





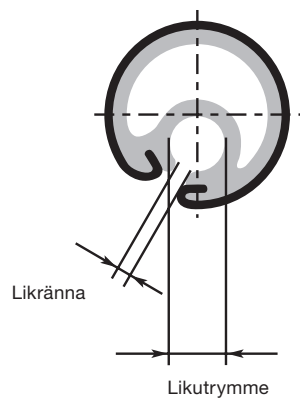

## Specifikationer, rullmaster

Mast-profil	Typ	Segel-utrymme, dia., mm	Segel-öppning	Max liklängd E, mm	Alternativ drivning			Utväxling manuell drift	Diameter mm	Likränna mm	Max. likutrymme dia., mm
					Manuell	Hydraulisk	Elektrisk (Volt)				
F176	RA	85	15±3	3750	X			1.75:1	25	2.75 ± 0,25	6
F194	RA	93		4200	X						
F212	RA	100		4500	X						
	RB			4400	X			2:1	30	3.25 ± 0,35	8
F228	RA	108		5000	X			1.75:1	25	2.75 ± 0,25	6
	RB			4900	X		X (12)	2:1	30	3.25 ± 0,35	8
F246	RB	114		5400	X	X	X (12)				
F265	RB	123	17±3	6000	X	X	X (12)				
	RC			5800	X	X	X (12/24)		38	3.25 ± 0,25	10
F286	RB	133		6500	X	X			30	3.25 ± 0,35	8
	RC		6300	X	X	X (12/24)		38	3.25 ± 0,25	10	
F305	RB	141		6900	X	X			30	3.25 ± 0,35	8
	RC			6700	X	X	X (12/24)		38	3.25 ± 0,25	10
	RD			6000		X		-	58		
F324	RC	154	15±3	7000		X	X (12/24)	2:1	38		
F370	RD	171	22±3	7500		X		-	58		
F406	RD	190	24±3	9500		X					



## Skyddsluckor och pluggar

	Beskrivning	Art. nr.
	Skyddslucka för öppning till segelintag och halshornsfäste. 57 x 126 mm. F194-F246.	540-026
	Skyddslucka för öppning till segelintag och halshornsfäste. 72 x 207 mm. F265-F406.	540-120
	Smörjhålsplugg, Ø 44 mm.	319-609